




RJ Works Sdn Bhd
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

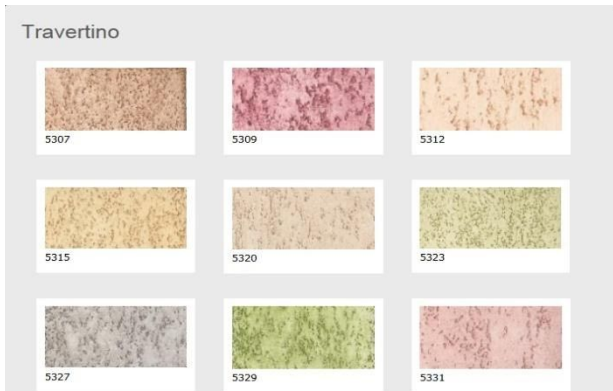

Silkcoat Effect Paints Travertino Paint 15kg Client Information Pack (160 square feet)

DESCRIPTION: Travertino is an Acrylic Copolymer cement based, antique stone decorative paint.

CHARACTERISTICS:

- **Travertino** offers a stone like appearance, presenting the quality of an aged, modern and live stone wall.
- It also allows for different pattern applications because of its water-based content
- It is harmless to people and environmentally friendly

APPLICATION SURFACES:

All pre-painted surfaces with floor preparation can be applied to interior surfaces such as concrete, plaster, black plaster, betopan.

TECHNICAL INFORMATION

Coverage (for 15kg): 15 m² / 160 sq ft

Structure: Styrene Acrylic

Density: 1.95 ± 0.02 (g / ml)



RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

Thinning ratio: Ready to use.

Drying Time: It takes 1 day to hard dry. If applied in 2 coats, the first coat dries in 24 hours.

PACKAGE

Package Includes:

1. 1 x 15kg of **Travertino Effect Paint** (160 sq ft)
2. 1 x **Travertino Primer Pack** for 160 sq ft
3. 1 x **Silkcoat Putty Primer** (in case of old putties on surfaces)
4. 1 x **Silkcoat Internal Acrylic Putty Pack** (in case surfaces need smoothing)
5. 1 x **SX2005 Pack Topcoat** for 160 square feet
6. 1 x Roller and Brush (for primer and **Travertino** application)
7. 2 x **Travertino** Application Decorative Trowel
8. 2 x Drop sheets (for floor and furniture protection)
9. 2 x Masking Tape Rolls
10. 6 x sheets sandpaper (2 x 100 grain, 2 x 80 grain, 2 x 70 grain)
11. 1 x sanding block

APPLICATION INSTRUCTIONS

INSTRUCTIONAL VIDEOS

https://www.youtube.com/watch?v=PQ8IVfIB9_Y

<https://www.youtube.com/watch?v=9IMbDP3o3A8>

SURFACE PREPARATION:

- The surface must be cleared of any oil, dirt or dust and swollen and old paintings must be scraped off - surface must be clean, dry and solid.



RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

- If necessary, defects and cracks on the surface should be repaired with **Silkcoat Internal Acrylic Putty**.

PRODUCT PREPARATION:

1. Ambient and surface temperature should be between + 5°C and + 35°C during application and product drying
2. Before using **Travertino**, it should be mixed until completely homogenous
3. Dilute **Travertino** as much as you can on each floor. Since the product is cement based, it can be dried.
4. If applied on very bright and glassy surfaces, a solid surface should be formed by sanding the surface first to ensure better adhesion.

APPLICATION:

1. Place drop sheets on floor and over any exposed furniture under surface to be painted
2. Apply masking tape to all corners and edges at boundaries of areas to be painted
3. **Travertino** is mixed with **20-25% water** until the first layer is flattened and mixed until it becomes homogenous.
4. **Travertino** is applied to the entire surface with trowel.
5. To make the surface smooth, the first coat is left to dry for 1 day after it has been smoothed with a trowel.
6. Prior to the application of the second layer, the surface is soaked with a roll of water.
7. When the dry surface is obtained, the second layer is again applied to the surface with a trowel.
8. When the second coat surface is about to dry, the patterns are created with the help of the backside of the trowel.
9. After enough lines have been formed, they are again smoothed with the trowel and left to dry for another day.
10. On the third day, the final surface is again wetted with water by means of a roller.



RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

11. Without full drying, **SX2005**, which is the last layer, is **diluted with 25-30%** and applied with the help of a **special tool**.



RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

SAFETY AND PERSONAL PROTECTION DURING USE

- Avoid getting eye and skin contact. In case wash with plenty of water
- Preserve in a tightly closed container
- Keep out of the reach of children

SAFE DISPOSAL OF WASTES

- Dispose of properly by washing all equipment and disposing of buckets etc in plastic recycling unit – DO NOT DUMP INTO SEWER SYSTEM

STORAGE:

- Keep in a cool and clean place away from direct sunlight
- NB: It can be stored unopened 1 year at room temperature