




RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

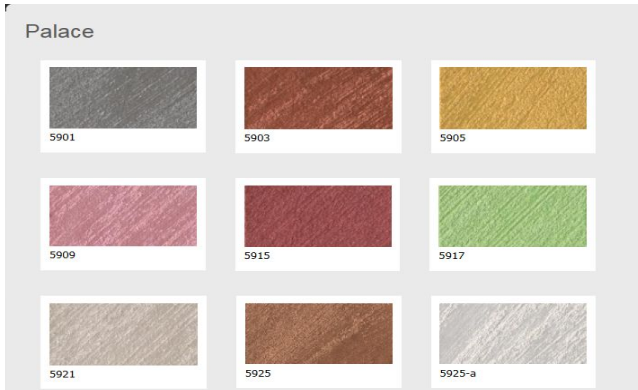

Silkcoat Effect Paints Palace Paint 3kg Client Information Pack (160 sq ft)

DESCRIPTION: Palace is a Pure Acrylic Emulsion Based, nacre additives, decorative interior wall paint grained structure with pearl effect.

CHARACTERISTICS:

- Thanks to its nacre structure, bright as pearl and matt, **Palace** offers a special image of texture, allowing for different pattern applications.
- Due to it being water-based sandy and having a metallic appearance, it gives the possibility to reflect your wall with coolness and splendor.

APPLICATION SURFACES:

- All pre-painted surfaces can be applied to interior surfaces such as concrete, plaster, black plaster, betopan, glass textured and paintable wallpaper.

TECHNICAL INFORMATION

Coverage (for 3kg): 15 m² / 160 sq ft

Thinner: No thinning, ready to-use

Drying: Touch dry: after 15-20 min, Dust repulsive: after 1-1.5 hour, Hard dry: after 24 hours

PACKAGE

Package Includes:

Rosaline 0199000188 Email : rosalin
Dennis 0169839715 Email: mcmder
www.rjworks.com.my





RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

1. 1 x 3kg of **Palace Effect Paint** (160 sq ft)
2. 1 x **Palace Primer Pack** for 160 sq ft
3. 1 x **Silkcoat Putty Primer** (in case of old putties on surfaces)
4. 1 x **Silkcoat Izolac Pack** (where the surface is gypsum plaster)
5. 1 x Roller and Brush (for primer and Palace application)
6. 1 x Palace Decorative Application Tool
7. 2 x Drop sheets (for floor and furniture protection)
8. 2 x Masking Tape Rolls
9. 6 x sheets sandpaper (2 x 100 grain, 2 x 80 grain, 2 x 70 grain)
10. 1 x sanding block

APPLICATION INSTRUCTIONS

INSTRUCTIONAL VIDEOS

<https://www.youtube.com/watch?v=t8wXWQJlIdM>

<https://www.youtube.com/watch?v=K4uxqBpby0Y>

SURFACE PREPARATION:

- The application surface should be free from all kinds of dust, dirt and oil.
- A clean, dry and solid surface should be obtained after lightly smoothing the blistered and old painted surfaces.
- If necessary, defects and cracks on the surface should be repaired with **Silkcoat Internal Acrylic Putty**. If the surface to be applied is flattened with gypsum plaster, **Silkcoat Izolac** should be used on the surface before Silkcomatt application, **Silkcoat Universal Primer** on old painted, dirty or synthetic painted surfaces; **Silkcoat Putty Primer** should be used on surfaces with putty application.

PRODUCT PREPARATION:

1. Ambient and surface temperature should be between + 5°C and + 35°C during application and product drying



RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

2. Before using **Palace**, it should be mixed until it becomes completely homogenous
3. If applied on very bright and glassy surfaces, a solid surface should be formed by sanding the surface first to ensure better adhesion.

APPLICATION:

- Silkomatt is applied as a single layer in the final coat as the same colour with Palace. **Silkcoat Palace** is applied, according to the desired pattern, with the help of a brush by taking a little amount of product with the brush's edge.
- When the product is about to dry, the liquid on the sand is removed with a clean, thick brush by slightly pressure.
- Thus, while the sand is taking its matte appearance, the subfloor will be gaining a glossy image.
- Tools should be cleaned immediately after application.

SAFETY AND PERSONAL PROTECTION DURING USE

- Avoid getting eye and skin contact. In case wash with plenty of water
- If swallowed, seek medical advice immediately; Show the container or label.
- Preserve in a tightly closed container
- Keep out of the reach of children

SAFE DISPOSAL OF WASTES

- Dispose of properly by washing all equipment and disposing of buckets etc in plastic recycling unit – DO NOT DUMP INTO SEWER SYSTEM



RJ Works Sdn Bhd
(762722-K)
Construction work / Durable wall and floor coating from Turkey

27, Jalan PJU 1A/20A, Ara Damansara 47301, Petaling Jaya, Selangor D. E.
Tel : 03-78317087 Website : www.rjworks.com.my

STORAGE:

- Keep in a cool and clean place away from direct sunlight NB: It can be stored unopened 1 year at room temperature